

# OFFICE 200 OMNI

SKU: 50 Ohm: 472047  
75 Ohm: 471047

## FEATURES

- Ideal amplifier system for small-to-medium businesses
- Covers up to 10,000 square feet
- Comes with LCD touch screen for increased usability
- Allows manual control of frequency bands
- FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular, and more



## KIT INCLUDES

<b>472047</b> 50 Ohm Kit	Office 200 Amplifier	Omni Plus Antenna 314422	Low Profile Dome Antenna 314407	Lightning Surge Protector 859902	2ft Low-Loss Wilson400 Cable 952302	60ft Low-Loss Wilson400 Cable 952360	75ft Low-Loss Wilson400 Cable 952375
<b>471047</b> 75 Ohm Kit	Office 200 Amplifier	Omni Plus Antenna 314423	Low Profile Dome Antenna 314407	Lightning Surge Protector 859992	2ft Low-Loss RG11 Cable 951127	60ft Low-Loss RG11 Cable 951160	75ft Low-Loss RG11 Cable 951175

## ABOUT


weBoost **Office 200 Omni** is perfect for small to medium-sized businesses and warehouses looking for a high-performance amplifier solution to improve cell signal in a commercial space. Office 200 Omni comes with a color LCD touch screen, allowing users to troubleshoot, assess performance, adjust the outside antenna, and turn bands on and off. All components needed for do-it-yourself installation are included. Office 200 Omni is 5G compatible and improves cell signal on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular and more. Office 200 Omni comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.

## SPECIFICATIONS

SKU NUMBER	472047† / 471047†	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	72 dB	
IMPEDANCE	50 Ohm / 75 Ohm	
POWER	110-240V AC, 50-60 Hz, 20 W	
CONNECTORS	N-Female / F-Female	
BOOSTER DIMENSIONS	14.25 × 10.75 × 2.25 in	
BOOSTER WEIGHT	7.7 lbs	

**⚠ WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## HOW IT WORKS

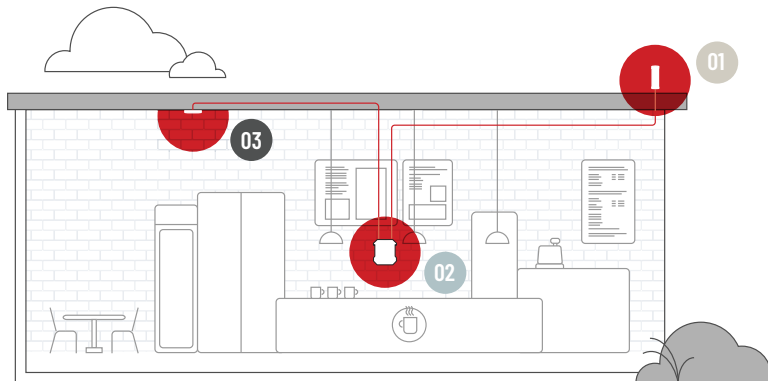

- 01 Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- 02 Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- 03 Inside antenna:** The inside antenna broadcasts these signals for use throughout your business.

## SPECIFICATIONS

Power output for single cell phone (Uplink) dBm	700 MHz Band 12/17	700 MHz Band 13	800 MHz Band 5	1700 MHz Band 4	1900 MHz Band 2/25
	24.0	24.0	25.0	25.0	25.0
Power output for single cell phone (Downlink) dBm	700 MHz Band 12/17	700 MHz Band 13	800 MHz Band 5	2100 MHz Band 4	1900 MHz Band 2/25
	15.1	15.1	15.3	15.2	15.2

## PACKAGE DIMENSIONS

19 L x 13 W x 13 H



MASTER CARTON: 19 L x 13 W x 13 H | 22 Lbs. | Qty 1

## SUPPORT



3-Year Warranty from Purchase.



FOR PARTNER'S USE

**ServSat**  
communications

UPC

