



MICROWAVE COMPONENT

L-BAND LINE ATTENUATOR LA100



SPECIFICATIONS


L-Band Frequency Range	950 to 2150 MHz (N) 950 to 1750 MHz (F)
Attenuation Options	6 to 18 dB depending on model number
DC Input Current max.	3 A between 0 to 48 V (N) 2 A between 0 to 48 V (F)
Dimensions (L x W x H)	90 mm x 35 mm x 25 mm (3.6 in x 1.4 in x 1.0 in)
Weight	140 g (4.9 oz)

APPLICATIONS

- Allows up to 3A of current in N-Connector Model
- Passes 10 MHz Reference Signal
- Passes L-Band, 10 MHz, 22kHz, and DC signals with minimal loss
- Rugged machined aluminum chassis
- Environmentally sealed and moisture resistant

HOW TO ORDER

LA106F

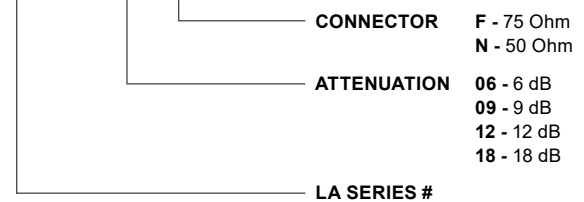

MECHANICAL DIAGRAM

