


TWISTABLE/FLEXIBLE WAVEGUIDE

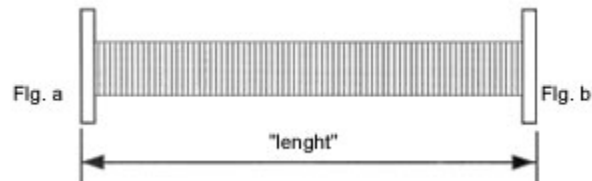

EIA WR SIZE	AMC PART NO:	FREQ: RANGE GHZ	VSWR PER 2 FT.	ATTEN. PER/FT.	POWER WATTS CW	POWER KW PEAK
28	209	26.5 - 40.0	1.30	0.600	75	20
42	208	18.0 - 26.5	1.20	0.350	100	39
62	207	12.4 - 18.0	1.12	0.200	400	100
75	206	10.0 - 15.0	1.12	0.150	750	140
90	205	8.20 - 12.4	1.10	0.100	1,000	180
102	204	7.00 - 11.0	1.10	0.090	1,500	300
112	203	7.05 - 10.0	1.10	0.080	1,500	315
137	202	5.85 - 8.20	1.09	0.070	2,000	500
159	211	4.90 - 7.05	1.09	0.060	2,500	1,100
187	201	3.95 - 5.85	1.09	0.050	3,000	1,250
229	212	3.30 - 4.90	1.07	0.023	4,000	1,550
284	200	2.60 - 3.95	1.09	0.018	4,000	2,000

AMC FLANGE CODES:
CO= UG COVER STYLE
CH = UG CHOKE STYLE
CG = COVER WITH O-RING GROOVE
G = CPR STYLE WITH GROOVE
F = CPR STYLE NO GROOVE
O= OTHER (specify)

MODEL NO:	W/G SIZE	FLANGES a/b	LENGTH (inches)	FLG MAT'L Brass/Alum.
AMCFLT	206	-CH/CO-	-36-	B

**SAMPLE P/N: AMCFLT206-
CH/CO-36-B**

The above referenced part number describes the following item: WR75 Twist/Flex assembly, with a choke and cover flange, made of brass. Length is 36".

Note: All models include silver plated flex, with standard neoprene jacket and flanges unplated, iridited and polished. Other finishes and jacketing are available upon request