



TSA8G1 USB Mini Spectrum Analyzer


TSA8G1 is a very cost-effective USB mini spectrum analyzer. It can do most of all basic test items that a general spectrum analyzer can do. TSA8G1 is a very tiny instrument, but it can cover very wide measurement range. It covers frequencies up to 8.15 GHz, powers up to 1 W, noise level as low as -110 dBm. The test data will be displayed with calibrated level, linearity and frequency.

TSA8G1 is very suitable for field test because it is very small and convenient to carry. It can be used as a device to monitor RF signal. It is also suitable for EMC test with near field probe.

Remote feature allows the product to be controlled remotely from far end computer via the internet. This allows easy setup of RF monitor system.

Features:

- ✓ Accurate and stable in frequency / level
- ✓ Extra low cost, extra low weight, best performance price rate
- ✓ Digitally synthesized RF system
- ✓ Frequency range up to 8.15 GHz
- ✓ Input Levels - 110 dBm to +30 dBm
- ✓ Connect to PC through USB without battery pack

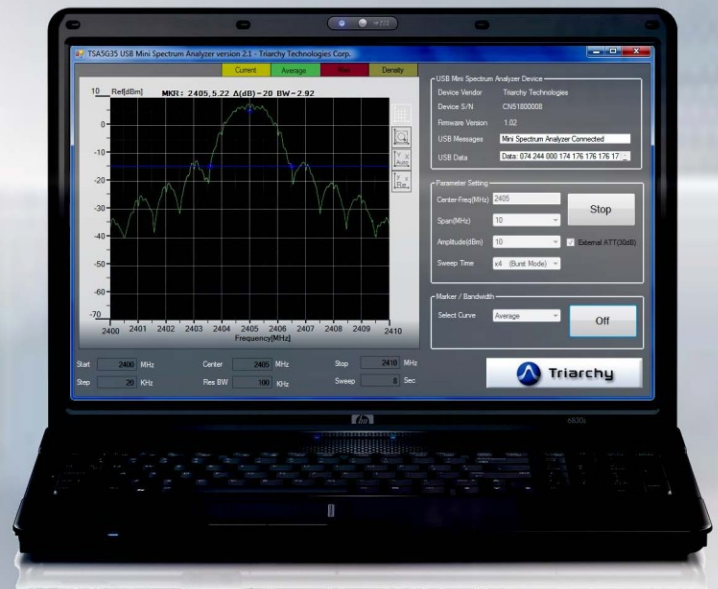

Application:

- Wireless Remotes, Cordless Phones, Wireless Monitors
- ATE system
- Education
- Industrial, Scientific, Medical (ISM) Band Application
- Cellular and PCS
- Two-Way Radio, Trunk Radio
- Bluetooth, WiFi, WiMax
- Field Service and Installation



SPECIFICATIONS

ITEMS	DESCRIPTION
Frequency Range	Band1: 1 MHz to 5 GHz, Band2: 5GHz to 8.15GHz
Minimum Step for Scanning	2 kHz at 1 MHz SPAN
Frequency Stability	< +/-5 ppm with software calibration
Frequency Spans	1 MHz to 1000 MHz for normal scanning (501 scanning points) 6 MHz to 600 MHz for fast scanning (250 scanning points)
Resolution Bandwidths	50 KHz, 100 KHz, 200 KHz, and 500 KHz, auto setting and free setting
Sweep Time	x1 to x32, basic scanning is around 2.3 s, fast scan is around 0.2 s
Input Level Range	-110 dBm to +30 dBm
Input Level Overload	Less than +20 dBm for 1 minute max at any scale when external attenuator is not connected. DC block to +/-25 VDC Less than +33 dBm when external attenuator is connected.
Reference Level Accuracy	< 3 dB between 100 MHz to 5 GHz at top level (1 GHz)
Display Range Linearity	< 4 dB (1 GHz) The linearity calibration is only worked at band1
Reference Level Flatness	< 2 dB within 100 MHz span at top level
Reference Level Range	-60 dBm to 0 dBm range without external attenuator for band1 -30 dBm to 30 dBm range with external attenuator for band1 -40 dBm to 20 dBm range without external attenuator for band2 -10 dBm to 30 dBm range with external attenuator for band2
Display Range	80 dB usable
Noise Floor	-115 dBm with 5 MHz SPAN and -60 dBm reference level at 1 GHz
Power Source	5 V from USB port
Dimensions	87.5 mm(L) x 23 mm(W) x 15 mm(H)
Weight	Less than 20 g.