we:boost

OFFICE 200 OMNI

SKU: 50 Ohm: 472047 75 Ohm: 471047

FEATURES

- Ideal amplifier system for small-to-medium businesses
- Covers up to 10,000 square feet
- Comes with LCD touch screen for increased usability
- Allows manual control of frequency bands
- FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular, and more





KIT INCLUDES

472047 50 Ohm Kit	Office 200 Amplifier	Omni Plus Antenna 314422	Low Profile Dome Antenna 314407	Lightning Surge Protector 859902	2ft Low-Loss Wilson400 Cable 952302	60ft Low-Loss Wilson400 Cable 952360	75ft Low-Loss Wilson400 Cable 952375
471047 75 Ohm Kit	Office 200 Amplifier	Omni Plus Antenna 314423	Low Profile Dome Antenna 314407	Lightning Surge Protector 859992	2ft Low-Loss RG11 Cable 951127	60ft Low-Loss RG11 Cable 951160	75ft Low-Loss RG11 Cable 951175

ABOUT


weBoost **Office 200 Omni** is perfect for small to mediumsized businesses and warehouses looking for a highperformance amplifier solution to improve cell signal in a commercial space. Office 200 Omni comes with a color LCD touch screen, allowing users to troubleshoot, assess performance, adjust the outside antenna, and turn bands on and off. All components needed for do-it-yourself installation are included. Office 200 Omni is 5G compatible and improves cell signal on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular and more. Office 200 Omni comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.

SPECIFICATIONS

SKU NUMBER	472047†/471047†			
FREQUENCIES	Band 12/17	700 MHz		
	Band 13	700 MHz		
	Band 5	850 MHz		
	Band 4	1700/2100 MHz		
	Band 25/2	1900 MHz		
MAX GAIN	72 dB			
IMPEDANCE	50 Ohm / 75 Ohm			
POWER	110-240V AC, 50-60 Hz, 20 W			
CONNECTORS	N-Female / F-Female			
BOOSTER DIMENSIONS	14.25 × 10.75 × 2.25 in			
BOOSTER WEIGHT	7.7 lbs			

★ WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

HOW IT WORKS

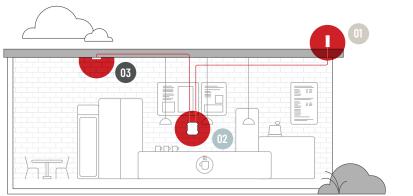


- **Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- **Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- Inside antenna: The inside antenna broadcasts these signals for use throughout your business.

SPECIFICATIONS

Power output for single cell	700 MHz	700 MHz	800 MHz	1700 MHz	1900 MHz
phone (Uplink) dBm	Band 12/17	Band 13	Band 5	Band 4	Band 2/25
	24.0	24.0	25.0	25.0	25.0
Power output for single cell	700 MHz	700 MHz	800 MHz	2100 MHz	1900 MHz
phone (Downlink) dBm	Band 12/17	Band 13	Band 5	Band 4	Band 2/25
	15.1	15.1	15.3	15.2	15.2

PACKAGE DIMENSIONS

19 L x 13 W x 13 H



MASTER CARTON: 19 L x 13 W x 13 H | 22 Lbs. | Qty 1

ServSat Communications, Inc.

FOR PARTNER'S USE

SUPPORT



3-Year Warranty from Purchase.



UPC

